






APPLICATION GUIDE

Step 1: Apply

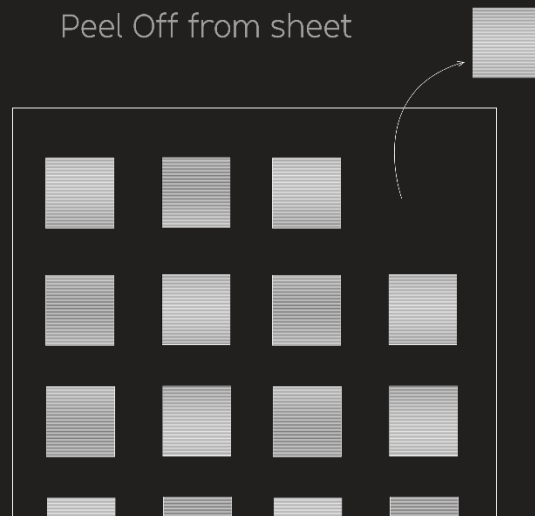


- Peel GlassOn from the sheet.
- Apply GlassOn to area beside your glasses hinges.
- Try to apply the padding as low as possible.
- Start with "Standard" pads, but feel free to swap it with the "Thin" pads if the glasses feel too tight. Allow for 1 week to make sure it is the right thickness.

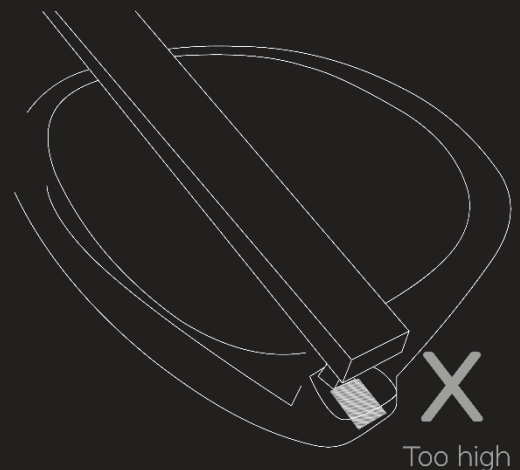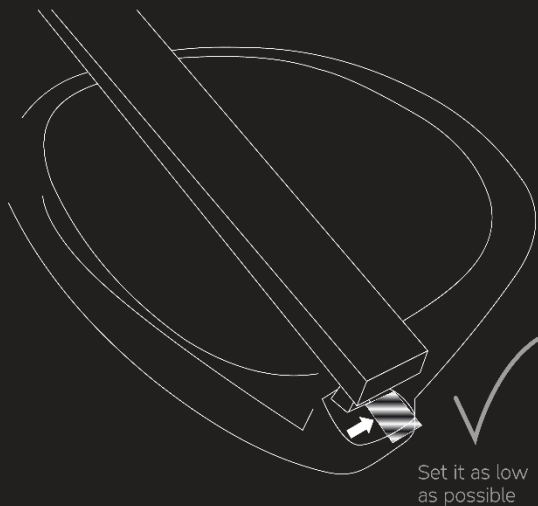


Step 2: Trim

- Trim excess materials using provided clippers.
- Discard the excess materials.

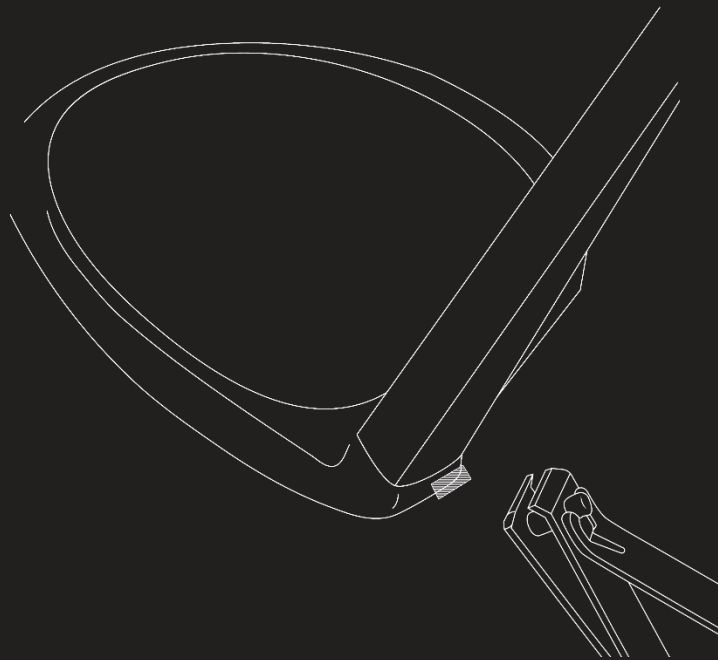

Step 3 (Optional) : Stack


- If you want to make the glasses more snug, you can stack a GlassOn padding on top of existing ones on your glasses.
- It is recommended to stack using "Thin" paddings first before using the "Standard".
- Stack to only one side and try if the glasses are snug enough. Wait for a week to ensure it is the right thickness.
- If your glasses feels too tight, remove the paddings you just applied or swap existing ones with "Thin" padding.

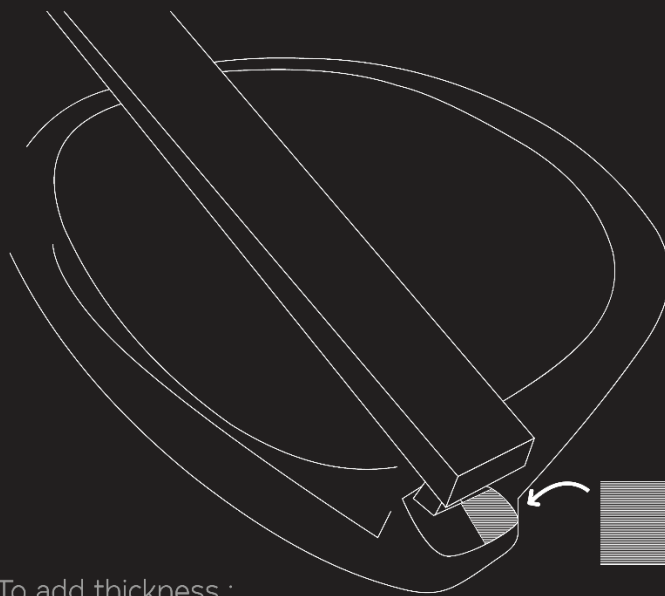

To add thickness :
Apply padding on top of existing ones.


Tips:

How To Fix Paddings Sliding Out?

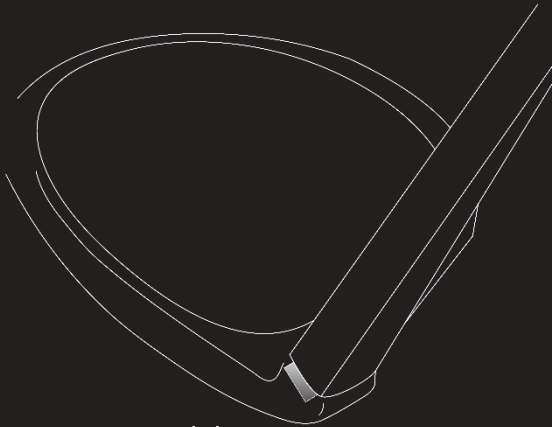

Is your padding
sliding out?

- GlassOn padding may slide out if the padding is placed too high.
- To fix this, remove then reattach said padding to lowest position.

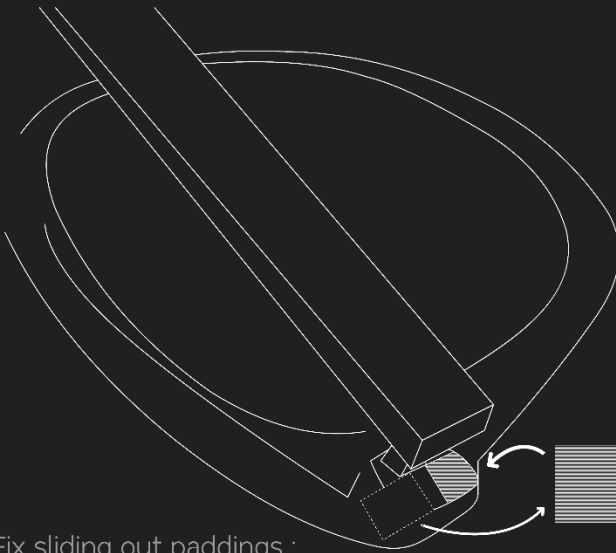

Fix sliding out paddings :
Remove and reattach to lower position.